

| |
|---------------|
| Project: |
| Type: |
| Date: |
| Product Code: |
| Approval: |



Durability, and performance with T8 lighting.

BFIN T8 - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Contractor-grade, surface and suspended mount fluorescent strip fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its multi-faceted reflector makes it ideally suited for general area illumination.

FEATURES

- Pre-painted, high-reflectance white body
- High-reflectance white steel reflector standard
- Can be row mounted

OPTIONS

- 4', 8' and custom lengths available (consult factory)
- Dimmable and emergency ballast
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 1, 2, 3 or 4 lamps available
- Wireguard with various finishes (consult factory)

APPLICATIONS

- Manufacturing
- Stairwells
- Storage areas
- Task lighting
- Warehouse facilities

APPROVALS

- ETL listed product

OPTICS

Pre-painted body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. Reflectors available in high-reflectance white steel, white aluminum and specularized aluminum. T8 fluorescent light source is standard.

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Fixture is available in 120 - 277VAC and 347V options.

MOUNTING


Can be row-mounted using a suspended or surface-mount configuration. Optional mounting is available with aircraft cable, chain or stem mounting.

CONSTRUCTION

Die-formed, heavy-gauge cold rolled pre-painted steel. End caps are fastened by screws allowing the flexibility of repositioning to act as joiners for raceway wiring. Non-tandem units offer a single piece reflector.



PRODUCT DIMENSIONS

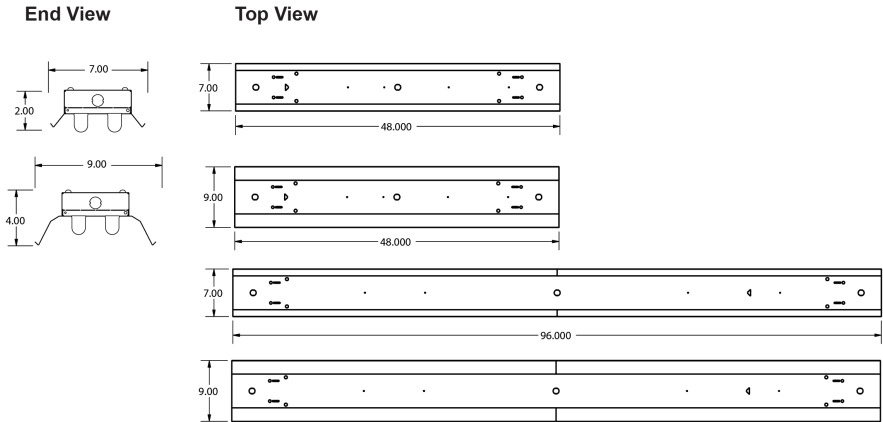

PRODUCT KEY

| Fixture Type | Fixture Length | Fixture Length | Number of Lamps | Lamp Watts | Lamp Type | Ballast Voltage | Ballast Factor | Options |
|--------------|----------------------|----------------------|-------------------------|------------------------|-----------|----------------------|----------------------|----------------------|
| BFIN | <input type="text"/> | <input type="text"/> | <input type="text"/> LP | <input type="text"/> W | T8 | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| | M - 2.00" | 2' | 1 | 17 | | 120 | Normal (N) | |
| | N - 3.00" | 3' | 2 | 32 | | 120/277 (UNV) | High (H) | |
| | (blank) - 5" | 4' | 3 | | | 347 | Low (L) | |
| | | 8' | 4 | | | | | |
| | | | 6 | | | | | |
| | | | 8 | | | | | |

OPTIONS

| | | |
|--|---|---|
| <p>Battery Back-Up (Needs to be specified)</p> <p>Wireguard G1 - Wireguard Heavy Duty, Painted White</p> | <p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92% S - Reflector - Shallow</p> <p>Sensors W12 - Motion Sensor - 10C</p> | <p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p>Hangers M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15')</p> |
|--|---|---|