Project:
Туре:
Date:
Product Code:
Approval:



BFMV

The BFMV is a fluorescent vandal-resistant fixture designed for surface mounting. It is well suited for indoor and damp locations, where vandal-resistant fixture is required.

FEATURES

- Full range of voltage options from 120-277V and 347V
- Vandal-resistant
- Injection moulded polycarbonate prismatic diffuser

OPTIONS

- Emergency Battery Back Up
- Tamper-proof fasteners

APPLICATIONS

- Display Cabinets
- Manufacturing
- Task Lighting
- Retail Stores

MOUNTING

Holes provided for surface mounting

DIMENSIONS

OPTICS

Pre-painted body in high-reflectance white. Injected moulded polycarbonate prismatic diffuser.

ELECTRICAL


All components are UL recognized

CONSTRUCTION

- Pre-painted white steel is precision bent for added strength and rigidity
- Deep body design allows for ease of installation and end power entry

APPROVAL

ETL Certified

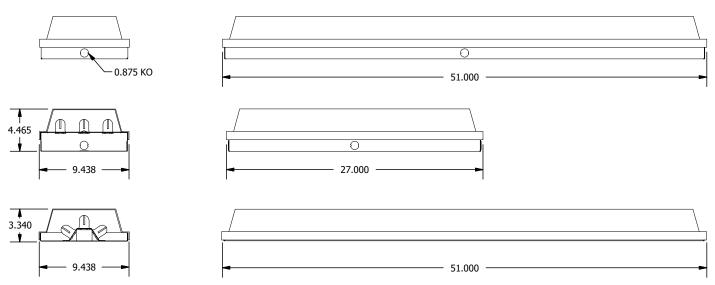

PRODUCT KEY

Fixture Type	Fixtı Dep		Fixture Length	Lumen Output		Lamp Wattage	Lamp Type		Ballast Voltage	Ballast Factor	Opti	ions
BFMV	-	-		-	LP -		Т8	-			-	
	Blank	- Deep	2'	1		17W		U	NV - 120-2	277V		
	S	- Shallow	, 4'	2		32W		34	47 - 347V			
				3								
									L-L	ow Ballast	Factor	
									N - N	lormal Balla	ast Factor	
Options												

Options								
Screws	Lenses							
Blank - Standard Screws	Blank - Moulded Polycarbonate Prismatic Diffuser							
SC1 - Vandal Resistant Screws	L72 - Moulded Polycarbonate Prismatic Diffuser with Foam Gasket							



