

<b>Project:</b>
<b>Type:</b>
<b>Date:</b>
<b>Product Code:</b>
<b>Approval:</b>



*Flexibility, functionality and superior craftsmanship.*

**BFR - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Specification-grade, recessed, lay-in T-Bar luminaire with framed door. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its low-profile body is ideally suited for shallow, or obstructed plenum installations.

**FEATURES**

- Available with 2, 3, 4, or 6 lamp configuration
- Clear, prismatic diffuser (acrylic)
- Access plate for easy wiring
- Built-in earthquake clips
- Available in T5, T8 or PLL/Biax configurations

**OPTIONS**

- Various sizes available: 1x4, 2x4 and 2x2
- Other finishes are available (consult factory)
- Multi-level switching
- Dimmable and emergency ballast
- Various diffusers available (consult factory)
- Flange kit for drywall ceiling

**APPLICATIONS**

- Hospitals
- Indoor recessed applications
- Offices
- Retail
- Schools

**APPROVALS**

- Adheres to CSA and UL standards

**OPTICS**

Pre-painted body in high-reflectance white. Optional reflector is available in high-reflectance white steel, white aluminum or specular aluminum. Diffuser is a clear acrylic lens with a #12 prismatic pattern (standard).

**ELECTRICAL**

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

**MOUNTING**


Holes provided for chain mounting support for T-Bar ceilings

**CONSTRUCTION**

Precision-formed, code gauge pre-painted, white steel. Access panel and knock-outs make it ideal for through or standard wiring. Quality, no tool, snap-in ballast cover provides fast access to the ballast for installation and servicing.



**PRODUCT DIMENSIONS**

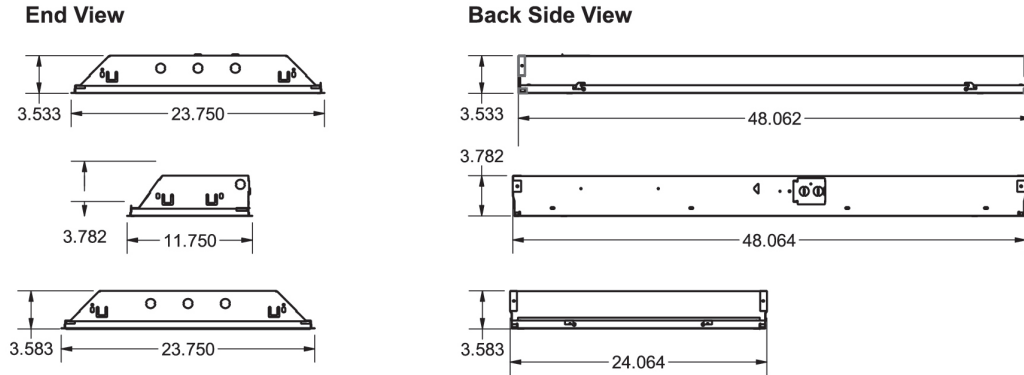

**PRODUCT KEY**

Fixture Type	Fixture Sizes	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFR		LP	W				
	1x4	1	28	T5	120	Normal (N)	
	2x4	2	32	T8	120/277 (UNV)	High (H)	
	2x2	3	54		347	Low (L)	
		4					
		6					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p>	<p><b>Reflector</b></p> <ul style="list-style-type: none"> <li>R1 - Reflector - White Steel</li> <li>R2 - Reflector - Full - White Aluminum 92%</li> <li>R3 - Reflector - Full - Specular Aluminum 92%</li> </ul> <p><b>Lamps</b></p> <p>Axxxxx- Lamps installed</p> <p><b>Fuse Holder</b></p> <p>F6 - Fuseholder, In-Line Single Pole</p> <p><b>Flange</b></p> <p>H14 - Flange (integral) for Drywall Installation</p>	<p><b>Lens</b></p> <ul style="list-style-type: none"> <li>L0 - No Lens Supplied</li> <li>L3 - Lens Acrylic Smooth Opal 0.080 Thick (1x4)</li> <li>L15 - Lens P12 Acrylic 0.110 Thick</li> <li>L20 - Lens P12 Acrylic 0.125" Thick</li> <li>L24 - Lens P12 Polycarbonate 0.125 Thick</li> <li>L55 - Clear Acrylic Lens</li> </ul> <p><b>Wire Guard</b></p> <p>G1 - Wireguard Heavy Duty, Painted White</p> <p><b>Louver and Baffle</b></p> <p>J18 - Parasquare 2x4 - 22.75 x 46.75 - Acrylic, Spec Silver</p>
---	---	--

