


Project:
Type:
Date:
Product Code:
Approval:

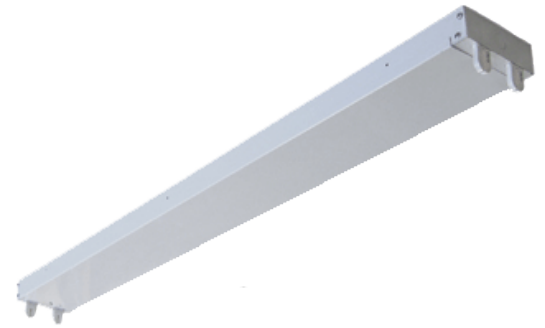

*Durability, and cost-effective fluorescent lighting.*

**BFSP T8 - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Contractor-grade, fluorescent surface and suspended mount strip fixture. It is ideal for indoor use, where energy-efficiency, performance and ease of maintenance is essential. Its rugged design and energy-efficiency make it ideally suited for task lighting or general illumination applications.

**FEATURES**

- 2', 3', 4' and 8' lengths available
- Available with 1, 2, 3, or 4 lamp configurations (custom configurations available)
- Optional wireguard allows added application flexibility
- Can be row mounted

**OPTIONS**

- 2', 3', 4' and 8' lengths available
- Available with 1, 2, 3, or 4 lamp configurations (custom configurations available)
- Continuous row-mounting available
- 347V options available
- Wireguard with various finishes (consult factory)

**APPLICATIONS**

- Coves
- Display cabinets
- Manufacturing
- Task lighting

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted body in high-reflectance white. T8 fluorescent light source is standard. Optional wireguard is available.

**ELECTRICAL**

All components have met all regulatory approvals. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

**MOUNTING**

Holes provided for convenient surface mounting or S-hook chain-mounting. Can be row-mounted using a suspended or surface-mount configuration.


**CONSTRUCTION**

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. End caps are fastened by screws allowing the flexibility of repositioning to act as joiners for raceway wiring. Shallow fixture design provides a clean appearance for many environments.




**PRODUCT DIMENSIONS**

**End View**

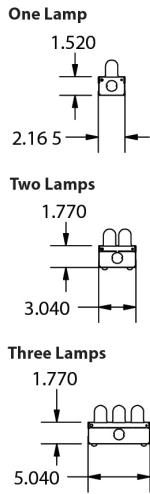

**Side View**

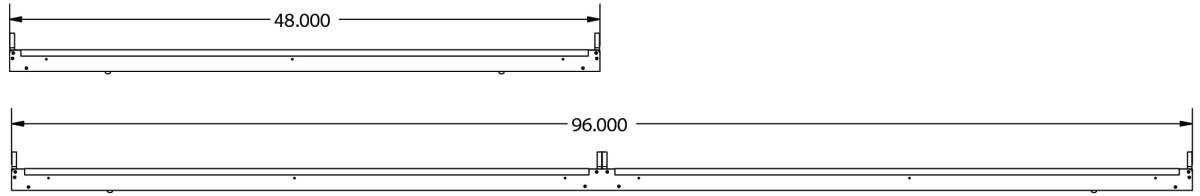

**PRODUCT KEY**

Fixture Type	Fixture Size	Fixture Length	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFSP				W				
	M (2W)	2'	1	17	T8	120	Normal (N)	
	N (3W)	3'	2	32		120/277(UNV)	High (H)	
	Blank (5W)	4'	3			347	Low (L)	
		8'	4					
			6					
			8					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p> <p><b>Sensors</b> W12 - Motion Sensor - 10C</p> <p><b>Wireguard</b> G1 - Wireguard Heavy Duty, Painted White</p>	<p><b>Wire</b> W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length) W5XX - Power Cord (Twist Lock - Specify Nema Code) W6XX - Power Cord (3-Wire 120V Plug, 14/3)(XX - Length) W8XX - Power Cord (3-Wire 120V 5-15P, 16/3)</p> <p><b>Hangers</b> M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y-Toggle", with cable gripper (5, 10 and 15')</p>	<p><b>Lamp Wattage</b></p> <table border="1"> <thead> <tr> <th>Length</th> <th>Nominal Lamp Watts</th> </tr> </thead> <tbody> <tr> <td></td> <td>T8</td> </tr> <tr> <td>24</td> <td>17</td> </tr> <tr> <td>36</td> <td>25</td> </tr> <tr> <td>48</td> <td>32</td> </tr> <tr> <td>96</td> <td>59</td> </tr> </tbody> </table>	Length	Nominal Lamp Watts		T8	24	17	36	25	48	32	96	59
Length	Nominal Lamp Watts													
	T8													
24	17													
36	25													
48	32													
96	59													

