

|               |
|---------------|
| Project:      |
| Type:         |
| Date:         |
| Product Code: |
| Approval:     |



*Vapour resistance and performance with fluorescent lighting.*

**BFVN - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Superior-grade, surface and suspended mount fluorescent enclosed and gasketed fixture. It is ideal for indoor or outdoor use where there is a high probability to exposure to dust, water or vapour. Its unique, IP67 certified body makes it ideal in environments where vapour-proof efficiency and performance are a factor.

**FEATURES**

- Available in 4' lengths only
- Fibreglass body with neoprene gasket ensures a dust and water resistant seal
- T5 or T8 lamps

**OPTIONS**

- Dimmable and emergency ballast

**APPLICATIONS**

- Food processing plants
- Garages
- Manufacturing

**APPROVALS**

- UL certified for Canada and USA
- Meets IP67 standards

**OPTICS**

Frosted lens provides even light distribution. T5 and T8 light sources are available.

**ELECTRICAL**

All components have met all regulatory approvals. End plugs allow for continuous wiring. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

**MOUNTING**


Can be mounted using suspended or surface-mount configuration.

**CONSTRUCTION**

Fibreglass enclosure with neoprene gasket ensures a dust and water resistant seal. End plugs allow for continuous wiring. Frosted acrylic lens for even light distribution.



**PRODUCT DIMENSIONS**

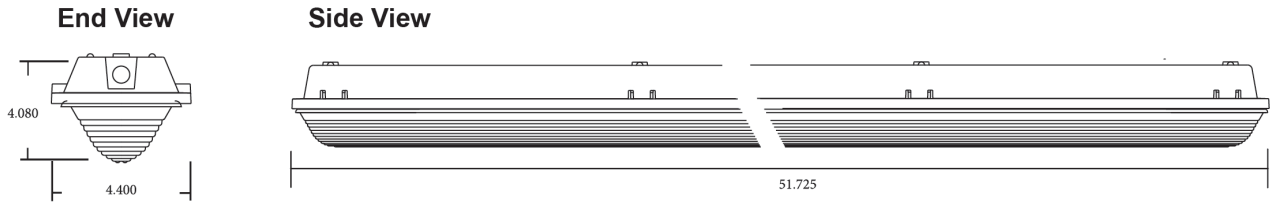

**PRODUCT KEY**

| Fixture Type | Fixture Size | Number of Lamps | Lamp Watts             | Lamp Type            | Ballast Voltage      | Ballast Factor       | Options              |
|--------------|--------------|-----------------|------------------------|----------------------|----------------------|----------------------|----------------------|
| BFVN         | 4'           | 1 LP            | <input type="text"/> W | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
|              |              |                 | 28                     | T5                   | 120                  | Normal (N)           |                      |
|              |              |                 | 32                     | T8                   | 120/277 (UNV)        | High (H)             |                      |
|              |              |                 | 54                     |                      | 347                  | Low (L)              |                      |

**OPTIONS**

|   |  |  |
|---|--|--|
| <p><b>Battery Back-Up</b><br/>(Needs to be specified)</p> | <p><b>Sensors</b><br/>W12 - Motion Sensor - 10C<br/>W13 - Motion Sensor - 40C<br/>W30 - Motion Sensor - IP Rated</p> | <p><b>Wire</b><br/>W1XX - Flexible Whip - 16/4 600V White (XX - Length)<br/>W2XX - Flexible Whip - 16/4 600V Black (XX - Length)<br/>W3XX - Flexible Whip - 16/3 600V White (XX - Length)<br/>W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p><b>Lens</b><br/>L62 - Clear Ribbed Polycarbonate Lens (CT2-DP-1L4)<br/>L63 - Frosted Ribbed Acrylic Lens (CT2-DIRA-1L4-FR50)</p> |
|---|--|--|